
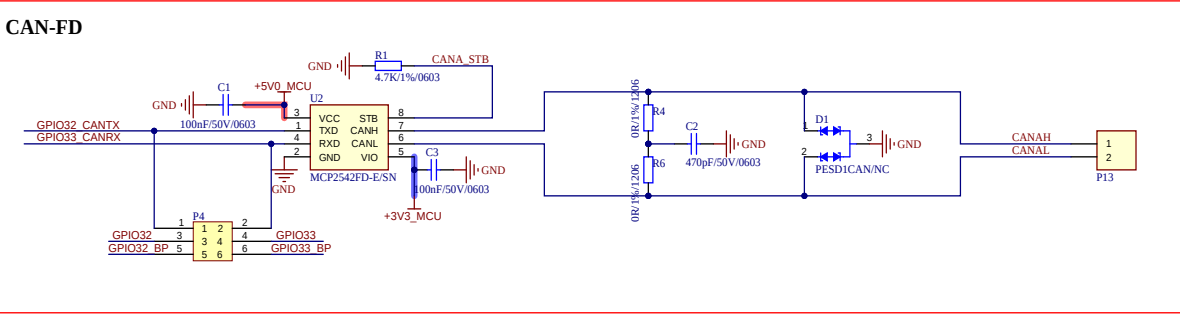
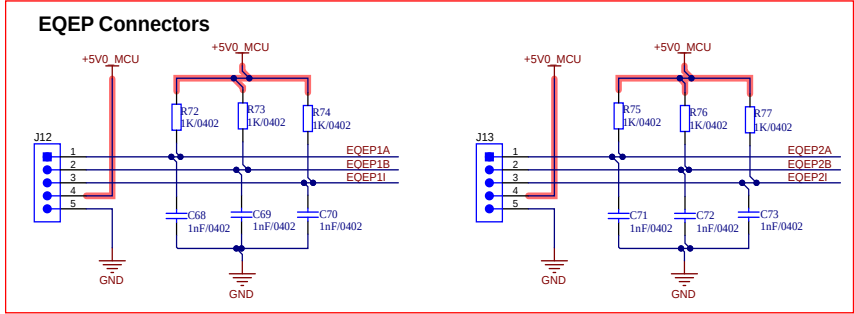
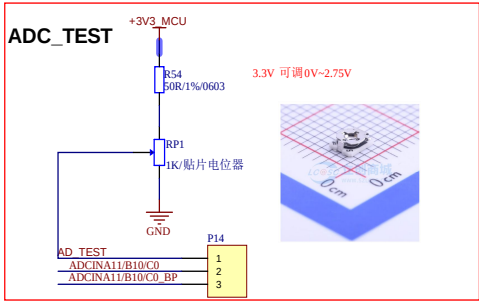
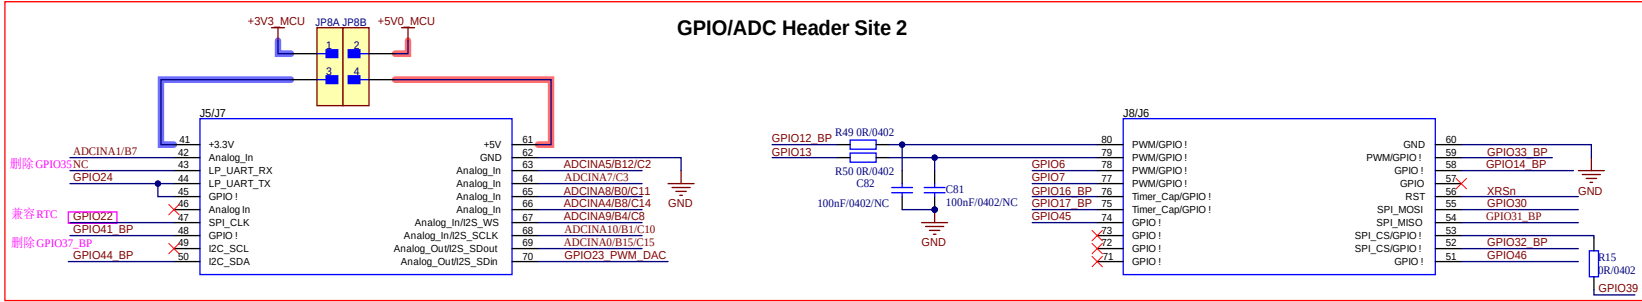
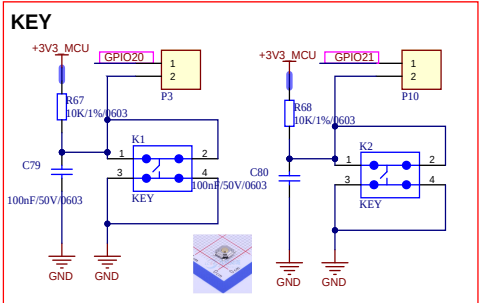
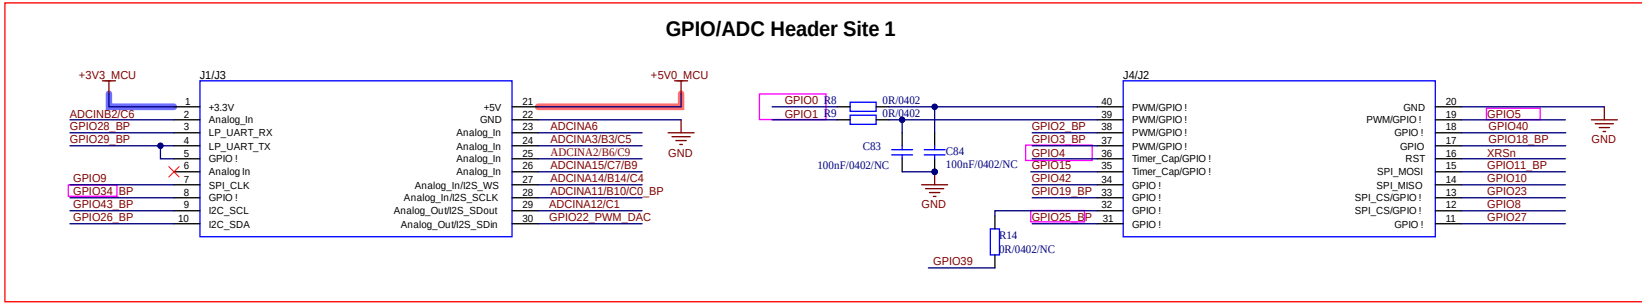
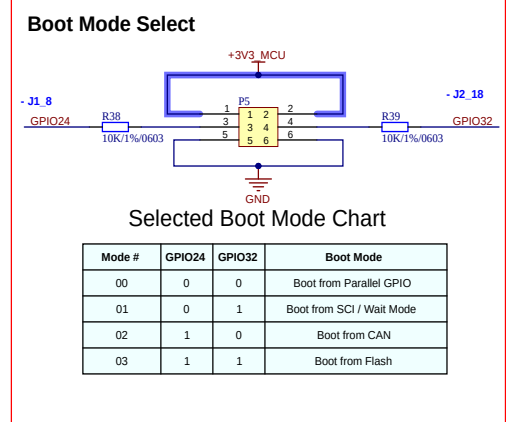
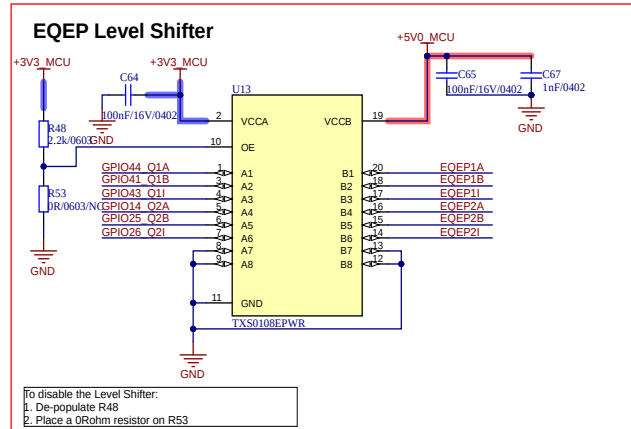
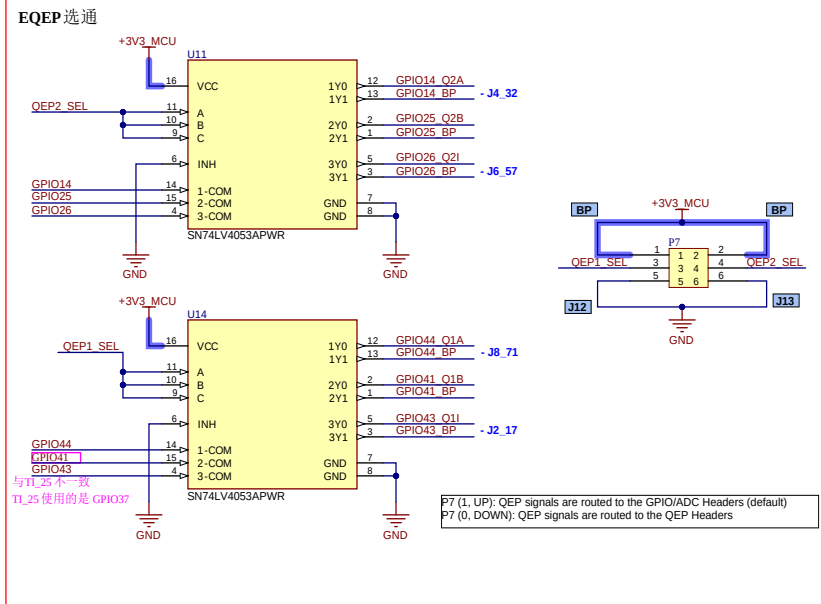
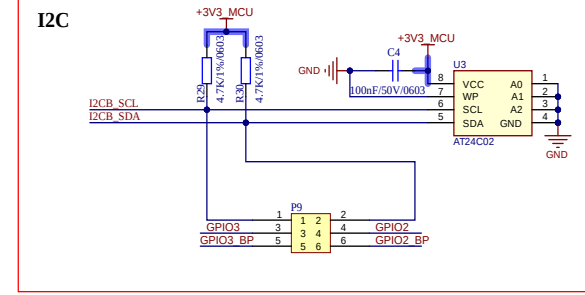
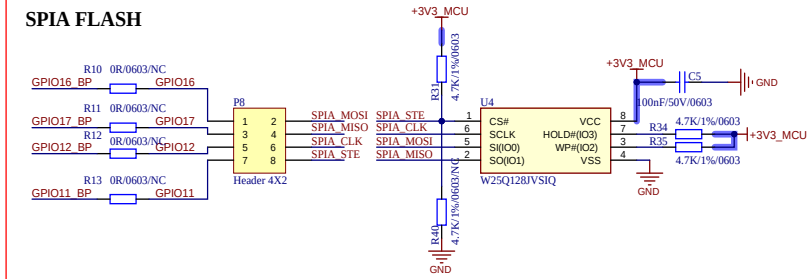
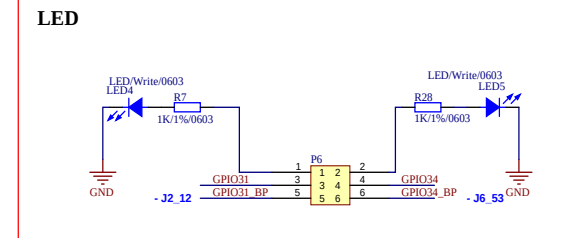
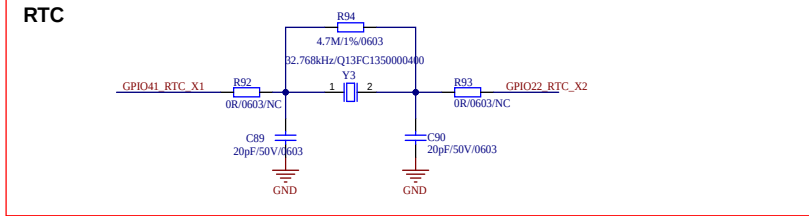





格见半导体 Draft Only

Title		
Xplorer_GS32F0039A_Connectors		
Size	Number	Revision
B	1	
Date:	7/03/2025	Sheet of
File:	D:\Desktop\Xplorer_GS32F0039A_Connectors	1 of 1

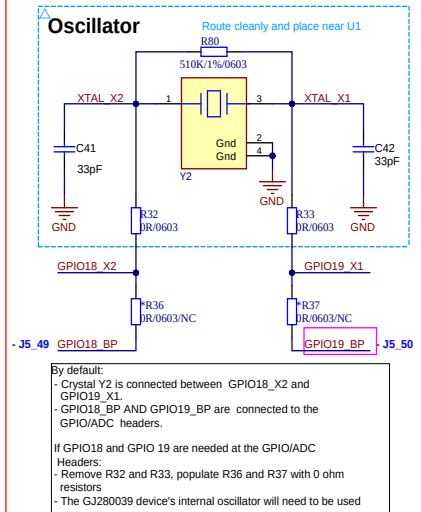

格见半导体 Draft Only

Title			
Xplorer_GS32F0039A_Peripheral			
Size	Number	Revision	
B	2		
Date:	7/03/2025	Sheet of	
File:	D:\Desktop\Xplorer_GS32F0039A_Peripheral	Drawn By:	

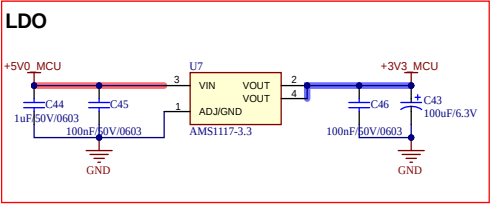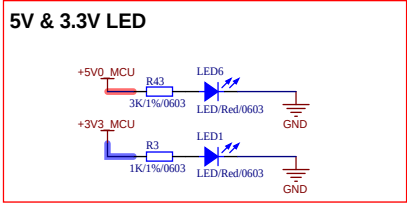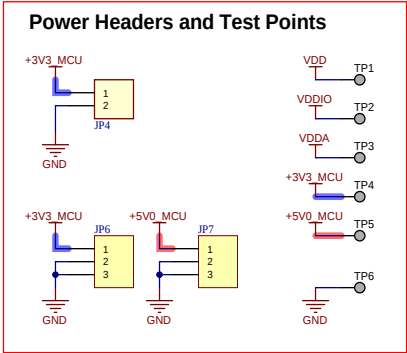


格见半导体 Draft Only

Gejian Semi. confidential - NDA Restrictions

Title			
Xplorer-GS32F0039A_Power			
Size	Number	Revision	
B	5		
Date:	7/03/2025	Sheet of	
File:	D:\Desktop\Xplorer-GS32F0039A_Power.Sch	Drawn By:	

GS32F0039A Device

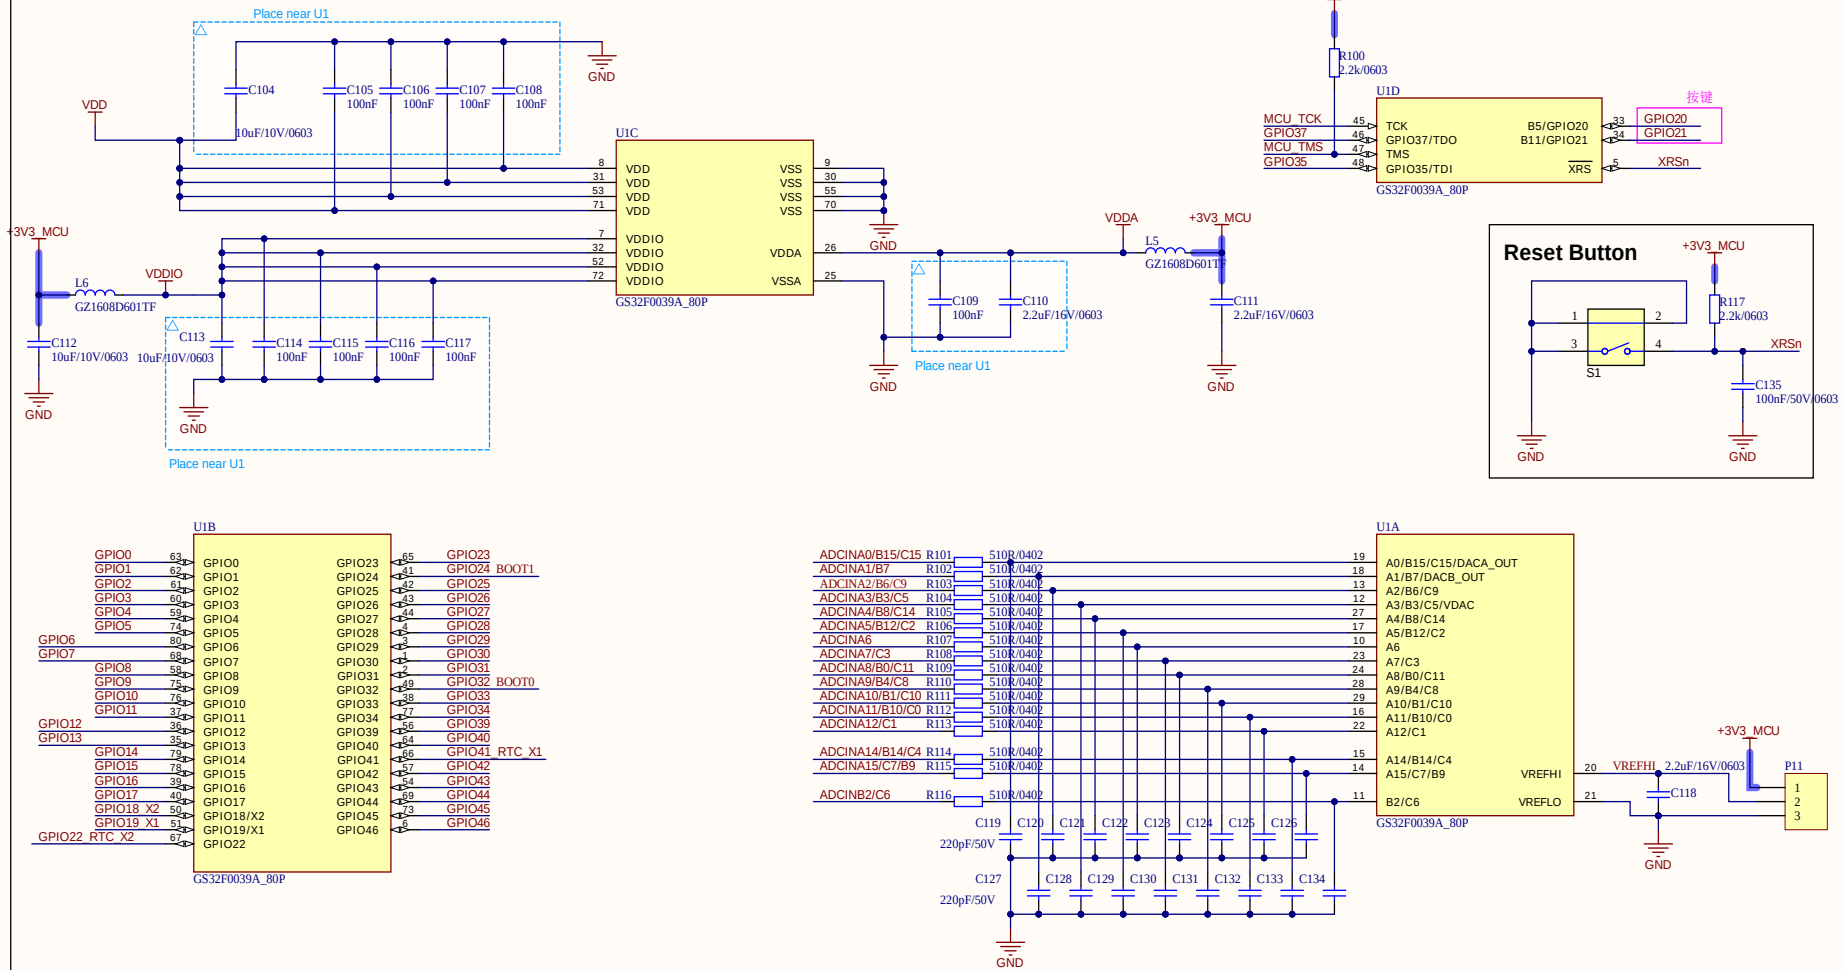


默认使用 GPIO41(EQEP) 和 GPIO22，电阻焊接

格见半导体 Draft Only


Gejian Semi. confidential - NDA Restrictions

Title		
Xplorer-GS32F0039A_Device		
Size	Number	Revision
A3	3	
Date:	7/03/2025	Sheet of
File:	D:\Desktop\Xplorer-GS32F0039A_Device\Xplorer-GS32F0039A_Device.sch	Drawn By:


USB

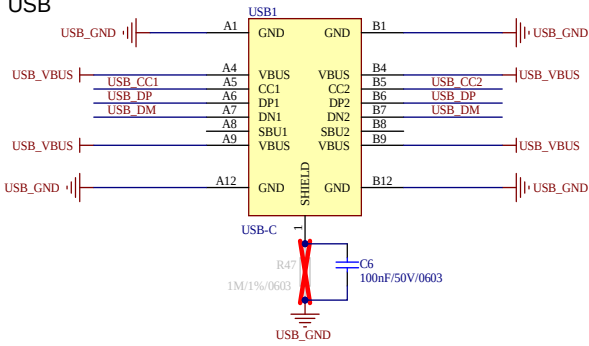


ESD




SPI

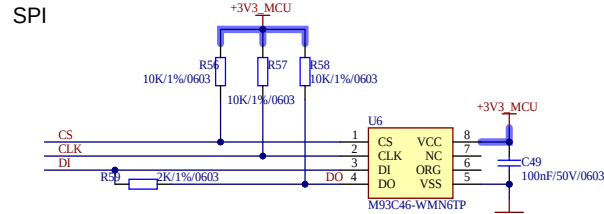

Oscillator





USB2UART

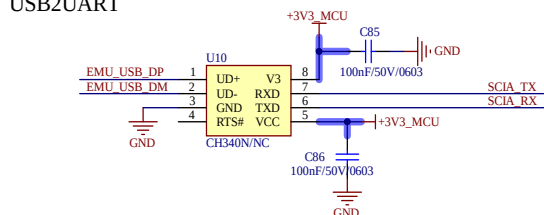

与板载调试器使用同一组串口，U10与U8 BOM 选择

Isolation Boundary

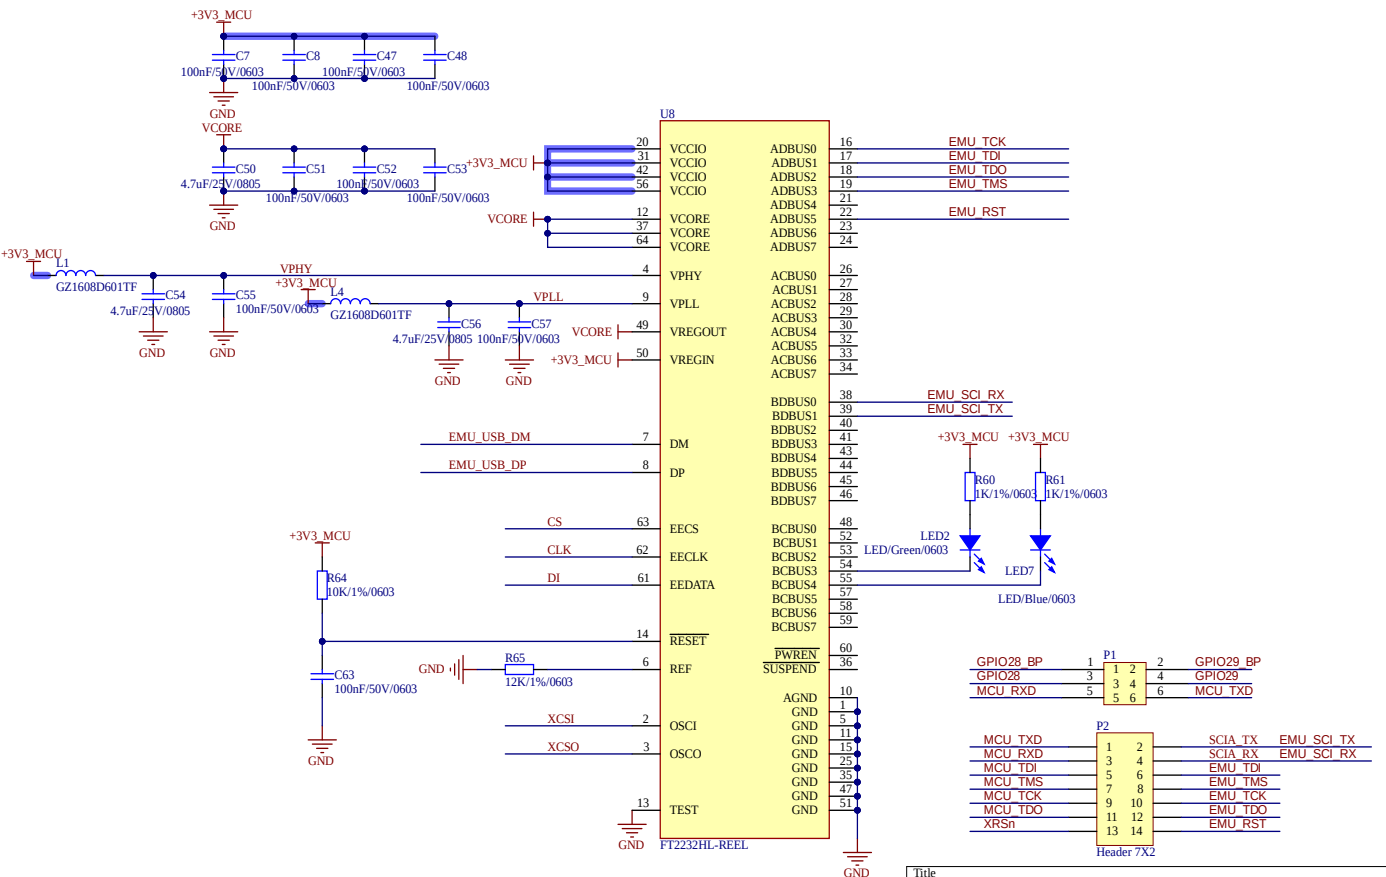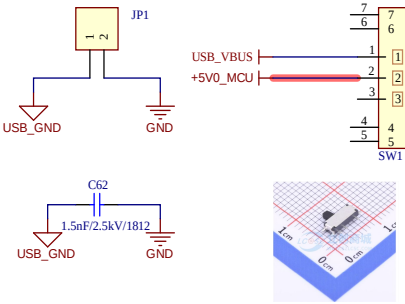

格见半导体 Draft Only

Gejian Semi. confidential - NDA Restrictions

Title			
Xplorer-GS32F0039A_FT2232			
Size	Number	Revision	
A3	4		
Date:	7/03/2025	Sheet of	
File:	D:\Desktop\Xplorer-GS32F0039A_FT2232	Drawn by:	

